

Ti-NAMITE[®]

TOOL COATINGS



Ti-NAMITE[®] Tool Coatings are specifically engineered for SGS[®] solid carbide rotary tools. This proprietary multi-layering process results in maximized tool life and increased speed and feed rates in any application.

Ti-NAMITE-A[®]

Recommended For Your Applications In...

- Cast Iron
- High-temperature Alloys
- Hardened Steels
- Stainless Steels

Ti-NAMITE-A (AlTiN) is Preferred for High-speed and Dry Cutting

Drilling Hardened Tool Steel

Hardness: 3300HV_{0.05}


Oxidation Temperature: 800°C - 1472°F

Coefficient Of Friction: .45

Thickness: 1 - 4 Microns (based on tool diameter)



Tool Type	Series 106M 6mm	Series 106M 6mm
	2362	2362
Condition	UNCOATED	Ti-NAMITE-A
Material Type	ISO 4957SSH5653 M4 @ 64 HRc	ISO 4957SSH5653 M4 @ 64 HRc
Depth of Cut	15 mm .519"	15 mm .519"
Width of Cut	6 mm .2362"	6 mm .2362"
Spindle Speed	9 m/min. 477 rpm	9m/min. 477 rpm
Feed	25.4 mm/min. 1 IPM	25.4 mm/min. 1 IPM

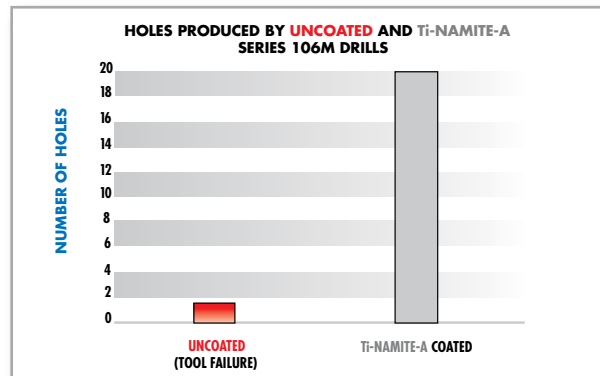

Ti-NAMITE-C


Recommended For Your Applications In...

- High Silicon
- Aluminum Alloys
- Titanium Alloys
- Low Carbon Steel
- Alloyed Steels



Milling Application Data

Tool Type	Series 1 1/2"	Series 1 1/2"
		12.7 mm
Condition	UNCOATED	Ti-NAMITE-C
Material Type	1018 STEEL	1018 STEEL
	DIN 1 0453	DIN 1 0453
Depth of Cut	.500"	.500"
	12.7 mm	12.7 mm
Width of Cut	.125"	.125"
	3.2 mm	3.2 mm
Spindle Speed	2782 rpm	4185 rpm
	111 m/min.	167 m/min.
Feed	33 IPM	50 IPM
	838 mm/min.	1270 mm/min.

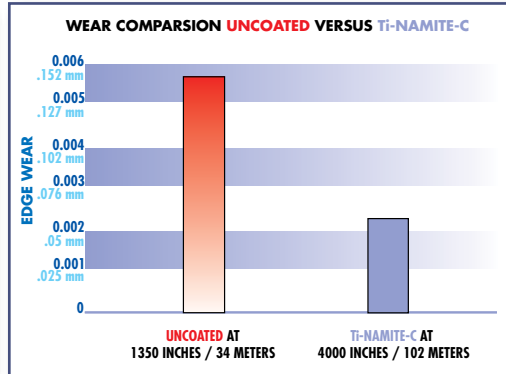

Hardness: 3000HV_{0.05}

Oxidation Temperature:
400°C - 752°F

Coefficient Of Friction:
.3 - .45

Thickness: 1 - 4 Microns
(based on tool diameter)

Ti-NAMITE


Recommended For General Purpose And Applications In...

- Stainless Steel
- Medium Carbon Steel
- Alloyed Steel
- Copper Alloys
- Brass
- Bronze



Milling Application Data

Tool Type	Series 1 1/2"	Series 1 1/2"
		12.7 mm
Condition	UNCOATED	Ti-NAMITE
Material Type	4140 STEEL	4140 STEEL
	DIN 1 7225	DIN 1 7225
Depth of Cut	.500"	.500"
	12.7 mm	12.7 mm
Width of Cut	.125"	.125"
	3.18 mm	3.18 mm
Spindle Speed	1955 rpm	2933 rpm
	78 m/min.	117 m/min.
Feed	23.5 IPM	32.5 IPM
	596.9 mm/m	825.5 mm/m

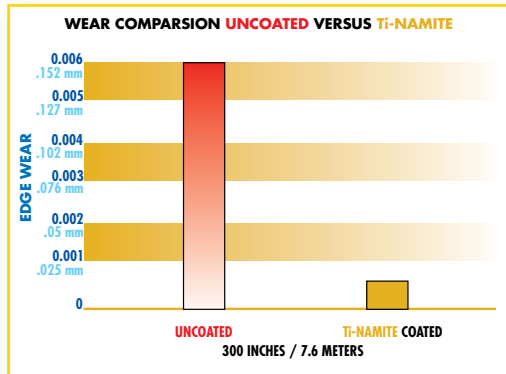

Hardness: 2200HV_{0.05}

Oxidation Temperature:
600°C - 1112°F

Coefficient Of Friction:
.4 - .65

Thickness: 1 - 4 Microns
(based on tool diameter)

Ti-NAMITE-B


Recommended For Your Applications In...

- High Silicon Aluminum Alloys
- Titanium Alloys



Milling Application Data

Tool Type	Series 135L 1/4"	Series 135L 1/4"
		6.35 mm
Condition	Ti-NAMITE	Ti-NAMITE-B
Material Type	6061 Aluminum	6061 Aluminum
	DIN AlMg1SiCu	DIN AlMg1SiCu
Depth of Cut	1.600"	1.600"
	40.6 mm	40.6 mm
Width of Cut	.2500"	.2500"
	6.35 mm	6.35 mm
Spindle Speed	7500 rpm	7500 rpm
	150 m/min.	200 m/min.
Feed	60 IPM	80 IPM
	1524 mm/m	2032 mm/m

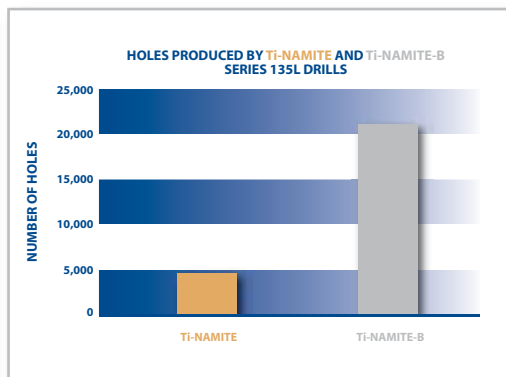

Hardness: 4000HV

Oxidation Temperature:
850°C - 1562°F

Coefficient Of Friction:
.45

Thickness: 1 - 2 Microns
(based on tool diameter)