


1

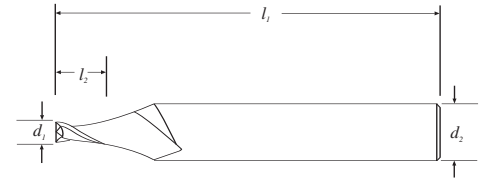

E

Series MK2 End Mills
Micrograin Solid Carbide
2 Flute - 30° Right Hand Spiral
- Right Hand Cutting - Center Cutting

ES

Fresas Serie MK2
de 2 filos
Carburo sólido con
micrograno
Hélice a derecha 30° - Corte a
derecha - Corte al centro

FR

Fraises Série MK2
Carbure monobloc, micrograin
2 dents - Hélice à droite, 30° -
Coupe à droite -
Coupe au centre

Cutting Diameter d_1	Length of Cut l_2	Overall Length l_1	Shank Diameter d_2	Uncoated EDP No.
0.008	0.012	1-1/2	1/8	39208
0.009	0.014	1-1/2	1/8	39209
0.010	0.015	1-1/2	1/8	39210
0.011	0.017	1-1/2	1/8	39211
0.012	0.018	1-1/2	1/8	39212
0.013	0.020	1-1/2	1/8	39213
0.014	0.021	1-1/2	1/8	39214
0.015	0.023	1-1/2	1/8	39215
0.016	0.024	1-1/2	1/8	39216
0.017	0.026	1-1/2	1/8	39217
0.018	0.027	1-1/2	1/8	39218
0.019	0.029	1-1/2	1/8	39219
0.020	0.030	1-1/2	1/8	39220
0.021	0.032	1-1/2	1/8	39221
0.022	0.033	1-1/2	1/8	39222
0.023	0.035	1-1/2	1/8	39223
0.024	0.036	1-1/2	1/8	39224
0.025	0.038	1-1/2	1/8	39225
0.026	0.039	1-1/2	1/8	39226
0.027	0.041	1-1/2	1/8	39227
0.028	0.042	1-1/2	1/8	39228
0.029	0.044	1-1/2	1/8	39229
0.030	0.045	1-1/2	1/8	39230
0.031	0.047	1-1/2	1/8	39231
0.035	0.053	1-1/2	1/8	39235
0.040	0.060	1-1/2	1/8	39240
0.047	0.071	1-1/2	1/8	39247
0.050	0.075	1-1/2	1/8	39250
0.055	0.083	1-1/2	1/8	39255
0.060	0.090	1-1/2	1/8	39260

TOLERANCES
$d_1 = \pm 0.0005$
$d_2 = -0.0001 - 0.0003$

